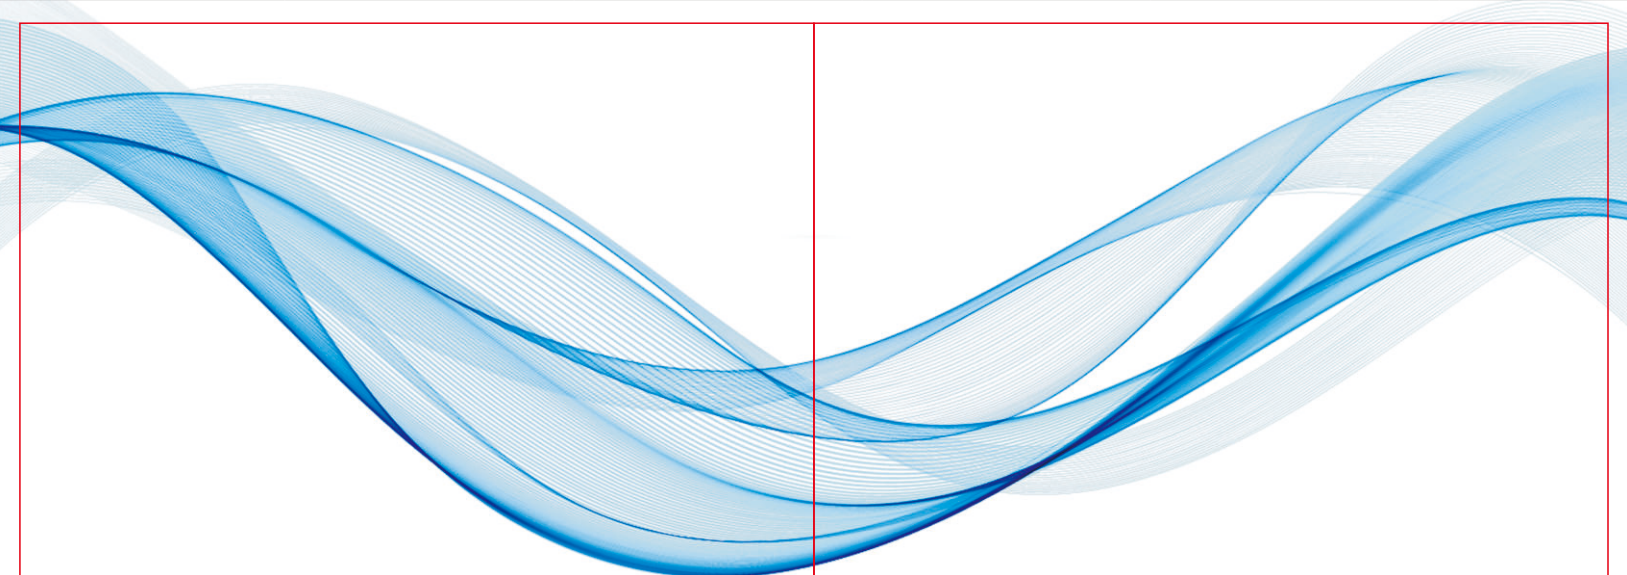


The background of the page features a series of overlapping, wavy blue lines that create a sense of motion and depth. These lines are contained within a thin red rectangular border.

# **User Manual**

## **B40 Series**


### **Handheld Inkjet Printer**

Read this manual carefully  
before using this product  
and keep it properly.

## Contents

|                                |    |
|--------------------------------|----|
| Parts Composition .....        | 1  |
| Technical Specifications ..... | 2  |
| Features .....                 | 3  |
| Operation Procedures .....     | 3  |
| Precautions .....              | 4  |
| Main Menu .....                | 4  |
| Troubleshooting .....          | 9  |
| Packing List .....             | 10 |
| Warranty Instructions .....    | 11 |
| Warranty Card .....            | 12 |

### Parts Composition

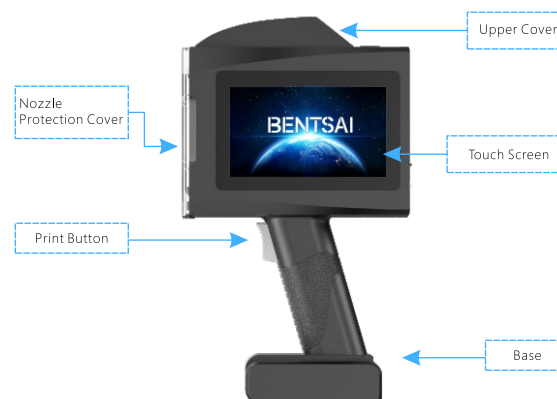

Machine diagram

## Technical Specifications

|                                 |                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Model                   | B40                                                                                                                                                                                                                                                                                                                         |
| Print Height                    | 2.5mm-50mm (1-20 lines)                                                                                                                                                                                                                                                                                                     |
| Optional Ink Cartridges         | Water based (42ml*2): Black, Cyan, Magenta, Yellow<br>Solvent Based (42ml*2): Black, Cyan, Magenta, Yellow, White, Green                                                                                                                                                                                                    |
| Printing Technology             | Thermal Inkjet (TIJ)                                                                                                                                                                                                                                                                                                        |
| Ink Throw Distance              | 2-5mm(Distance between nozzle plate and print object)                                                                                                                                                                                                                                                                       |
| Operation System                | Linux based                                                                                                                                                                                                                                                                                                                 |
| System Language                 | Chinese/English/German/Arabic/Spanish/Russian/Japanese/Korean/Italian/Portuguese<br>/French/Hindi/Thai/Vietnamese/Persian/Turkish/Chinese Traditional/Indonesian/Slovenian<br>/Serbo-Croatian/Czech/Bulgarian/Romanian/Polish/Greek/Hungarian/Ukrainian/Slovak<br>/Burmese (Available languages vary for different regions) |
| Display                         | 5" High Definition Touch Screen                                                                                                                                                                                                                                                                                             |
| Status Alarm                    | Green: Ready Blue: Printing Red: Alarm                                                                                                                                                                                                                                                                                      |
| Print Applications              | Text, Numbers, Images, Logos, 2Dcodes, Barcodes, Dates, Counter, Database etc.                                                                                                                                                                                                                                              |
| Printable Materials             | Waterbased inks for Porous and semi porous substrates: Paper/ Corrugated box/ Woodery/<br>Fiberboard/ Cotton etc.<br>Solvent based inks for semi porous and non porous substrates: Plastic/ Glass/ Metal plates/<br>Alu foils/ Cables etc.                                                                                  |
| Barcode Type                    | Code128, Code39, EAN8, EAN13, UPCA, ITF(2of5)                                                                                                                                                                                                                                                                               |
| 2D code Type                    | DateMatrix, QR codes                                                                                                                                                                                                                                                                                                        |
| Font Type                       | True type fonts, Dotmatrix fonts                                                                                                                                                                                                                                                                                            |
| Resolution                      | 300dpi                                                                                                                                                                                                                                                                                                                      |
| Max. Print Size                 | 50mm*2000mm                                                                                                                                                                                                                                                                                                                 |
| Max. Pixel Size                 | Standard 566px*12800px                                                                                                                                                                                                                                                                                                      |
| Print speed                     | 15m/ min                                                                                                                                                                                                                                                                                                                    |
| Grey level                      | 1-10 Adjustable                                                                                                                                                                                                                                                                                                             |
| External Ports                  | USB, Type-C, Power adapter, Photoelectric Sensor, Encoder, Beacon                                                                                                                                                                                                                                                           |
| Power Adapter                   | Input: AC100-240V, 50/60Hz Output: DC9.3V-5A                                                                                                                                                                                                                                                                                |
| Working Environment Recommended | Working Temperature: 5-35°C<br>Storage Temperature: 0-45°C<br>Relative Humidity: 10%-80%                                                                                                                                                                                                                                    |
| Battery                         | 6000mAH                                                                                                                                                                                                                                                                                                                     |
| Standby Time                    | ≥8 hours (working when screen off)                                                                                                                                                                                                                                                                                          |
| Memory Size                     | 4 Gigabytes                                                                                                                                                                                                                                                                                                                 |
| Net Weight                      | 860g                                                                                                                                                                                                                                                                                                                        |
| Packaging Weight                | 3.5kg(Aluminum case)                                                                                                                                                                                                                                                                                                        |
| Product Dimension               | 220*110*75mm                                                                                                                                                                                                                                                                                                                |
| Packaging Dimension             | 378*178*270mm                                                                                                                                                                                                                                                                                                               |

2

## Features

- 01 Max Print Height 50mm
- 02 Windows Style User Interface
- 03 Large Capacity Rechargeable Removable Battery
- 04 300 dpi High Resolution Printing
- 05 5-inch Color HD Touch Screen

## Operation Process

① **Ink cartridge installation:** Press the upper cover opening button to open the upper cover, insert the ink cartridge into the machine, and close the upper cover.  
② **Printing procedure:** Press the power switch to start the machine → [Print Edit] → Select the content type → Edit the content → Click [Print] → Remove the protective cover of the nozzle → Lay the main and auxiliary rollers to the product surface → Hold down the print button and slide at a constant speed after hearing the "beep" sound to print → Print job done.  
③ **Printer close procedure:** Click the [Cancel] button when printing job finished Recap the nozzle protection cover.

## Precautions


- ⚠ Do not use non-genuine ink cartridges.
- ⚠ In case of any abnormality of the machine, see **Troubleshooting**. Do not disassemble the machine without permission.
- ⚠ Do not remove the smart chip stuck on the cartridge without permission, otherwise, the machine may not be used properly.
- ⚠ When cleaning the machine, keep it away from water and do not use chemical solvents for cleaning.
- ⚠ After printing, close the protection cover of the nozzle in a timely manner to prevent ink nozzles from clogging.
- ⚠ Do not place the machine in a humid environment for a long time, Otherwise the circuit will get damp.

3

## Main Menu



## Print Edit




 Edit the print content as required.

- File: Create, Open, Save, Save as your print jobs.
- Settings: Set printing parameters.
- Add: Add Text, QR codes, Barcodes, Images, Time, Serial Numbers, Database, Graphics and Icons as needed.
- Align: Adjust positions of the print contents.
- Print: Click print to start the current printing job.
- Edit: Re-edit selected content.
- Back: Return to previous menu.

4


## Print Management



 Manage file groups, jobs, pictures, databases, fonts, icons.

- Group printing: Add needed files to the print list and print them in sequence.
- Job management: Delete or rename job files.
- Image, database, font and icon management: Delete or rename documents.


## System Settings



- Print settings: Set printing parameters.
- Prompt tone settings: Set printer's working prompt tone.
- Screen settings: Set screen brightness.
- Power settings: Standby, shutdown time settings.
- Cartridge Settings: Ink parameters setting to set the ink parameters including pulse and voltage. Cartridge parameters setting to adjust the two print heads stitching of the cartridges.
- Time settings: Set local system time.
- Language setting: Set local system language.
- Restore factory settings: Restore the default settings of system parameters.

5

## Print Settings



! Edit the printed parameters.

- Printing resolution:300dpi.
- Printing mode:Handheld, photoelectric, continuous mode.
- Printing direction:From Left to right, From right to left.
- Gray scale:1-10 level,Different materials use different gray levels, and gray levels can be selected according to the actual material.
- Synchronous mode: Hand-held mode is run by printer's built-in main roller . Photoelectric Mode can be connected with external synchronous wheel. Continuous Mode can be run by the printer's main roller or external synchronous wheel.
- First trigger: Available for Continuous Mode only.
- Printing delay :0-1000mm (Photoelectric Mode only).
- Printing speed :20-1000mm/s.
- Repetition: Set the repeated printing counts for a single job, supporting 1-999999 times (available for Continuous Mode only).
- Printing Interval: Set the distance between prints, 80-1000mm(available for Continuous Mode only).

## Ink Cartridge Parameter Settings



6

## Print Heads Stitching Alignment

Nozzle 2

Nozzle 1



! Click Setting>Cartridge>Cartridge to realign and adjust the cartridge stitching

- For example, as shown on the above figure, the print outs of Print nozzle 2 is misplaced/ misaligned and offset to the right in about 1mm measuring by a caliper.
- To solve this problem, click Setting>Cartridge Settings>Cartridge . Click the Nozzle 2 left arrow, moving the value one unit to the left is equivalent to moving 0.1mm, move the value 10 units (equals 1mm) to the left (276-266) will do.
- Up and down misalignment can be debugged in the same way.

## Device Maintenance




! Routine maintenance and system upgrades for the printer and cartridge.

- Nozzle cleaning: Clean the print nozzles if clogged.
- Nozzle moisturizing: can set the moisturizing time, moisturizing level.
- Nozzle test: Use the system test page to test and verify the printing effect.
- Demo page: Print the Demo page to test and verify the print effects.
- Firmware upgrade: Contact your printer customer support to get the latest firmware, unzipped it and copy to the U-disk, insert it to your printer and then go to the Device Maintenance for firmware upgrade.

7

Note: Ensure that the printer remaining power is above 25% before firmware upgrade. In case it is insufficient, connect the charger during the upgrading process. Power off during the upgrade process may damage the printer.

### U-Disk



! Machine-to-machine interaction of data.

- Data, including print jobs, images, database, fonts and icons could be imported and exported.

Note: Picture should be named by numbers and letters only. This printer can recognize BMP, JPG and PNG formats. Picture resolution is not allowed to exceed (vertical \* Horizontal)

### Device Information



- ! Printer: View the printer model, serial number and firmware version.
- Ink cartridge: Check the print counts and ink droplets consumption of each cartridge.
- Battery: Check the battery status, remaining power and total charge times.
- Memory: Check the Memory size occupied and its specific file type size.

## Troubleshooting

| No. | Failures           | Cause                                                                                                                                                     | Solutions                                                                                                                                                    |
|-----|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | Failed to power on | Low or damaged battery<br>Poor Battery Contact                                                                                                            | Recharge/Replace the battery<br>Reinstall the battery                                                                                                        |
| 2   | Failed to print    | Incorrect ink cartridge installation<br>Ink cartridge depleted<br>Incorrect parameter settings<br>Wrongly edited print content<br>Abnormal roller rolling | Reinstall the ink cartridge<br>Replace with a new ink cartridge<br>Restore factory settings<br>Re-edit your print content<br>Clean debris on the roller gaps |
| 3   | Unclear Printing   | Incorrect parameter settings<br>Clogged ink nozzles<br>Ink cartridge depleted<br>Insufficient power                                                       | Restore factory settings<br>Clean the ink nozzles<br>Replace with a new ink cartridge<br>Recharge or replace the battery                                     |

### Error messages shown on printer screen and Solutions

| No. | Error Message                | Error Message Code | Solutions                                                               |
|-----|------------------------------|--------------------|-------------------------------------------------------------------------|
| 1   | Ink cartridge not installed  | NA                 | Reinstall the ink cartridge                                             |
| 2   | Ink cartridge not recognized | 03                 | Replace the cartridge or cartridge smart chip                           |
| 3   | Ink cartridge error          | 04/05/07/08        | Replace the cartridge or cartridge smart chip                           |
| 4   | Ink cartridge error          | 06                 | Incorrect cartridge installed, replace with the correct cartridge model |
| 5   | Ink low                      | NA                 | Ink volume less than 5%                                                 |
| 6   | Ink finished                 | NA                 | Ink volume less than 20%                                                |

## Packing List

| NO. | Name                                    | Quantity |
|-----|-----------------------------------------|----------|
| 1   | Handheld Inkjet Printer                 | 1 set    |
| 2   | Genuine ink cartridge                   | 2 pcs    |
| 3   | User Manual                             | 1 pcs    |
| 4   | Certificate                             | 1 sheet  |
| 5   | USB flash drive or Photoelectric sensor | 1pcs     |
| 6   | Positioning plate                       | 1pcs     |
| 7   | Power adapter                           | 1pcs     |

**Note:** Optional accessories and components need to be purchased independently.

## Warning

Replacing the battery with an incorrect type may bring the risk of fire, explosion, or damage to the device. Replace only with the same or equivalent battery type.

Throwing a battery into a fire, into a hot oven, mechanically crushing or cutting a battery can cause an explosion.

Batteries may be subjected to high or low temperature extremes or high altitude and low air pressure during use, storage or transportation.

Exposing the battery to extremely high temperature or low pressure may result in an explosion or leakage of flammable liquid or gas.

## Warranty Instructions

Dear customer,

Thank you for purchasing our handheld/inline inkjet printer! To ensure the safe use of the product and your benefits and interests, please read the following content carefully, fill in and keep the warranty card properly.

This product is a precision instrument. In case of any abnormality, refer to this manual for troubleshooting or contact the customer service center of your seller.

### ■ Term of Service

1. This product is with a one-year warranty period. The starting date of the warranty period is subject to the date of the product invoice.
2. During the warranty period, if the product is under normal use and maintenance and failure is caused by the quality of the machine itself, the company will provide free repair and replacement parts.
3. Vulnerable parts are excluded, such as ink cartridges, screens, removable storage, switches, chargers, batteries, which shall not be covered by the warranty.

### ■ Disclaimer

Any of the following conditions shall not be covered by the warranty:

1. Damage due to improper transportation, use, storage, and maintenance, or man-made damage.
2. Unauthorized repair or the user installs, disassembles, and repairs the machine by himself.
3. Damages caused by using non-genuine consumables or accessories which are not provided by the company.
4. Missed or modified warranty card.
5. Beyond the warranty period.
6. Damage caused by force majeure.

## Warranty Card

### Product Related information

|                    |                |
|--------------------|----------------|
| Customer Name:     | Contact Phone: |
| Mailing Address:   |                |
| Product Model:     | Product ID:    |
| Store Purchased:   | Purchase Date: |
| Maintenance Store: | Invoice No.:   |

### Maintenance Record

|                      |                |                  |
|----------------------|----------------|------------------|
| Date of Maintenance: |                |                  |
| Failure Description: |                |                  |
| Solution :           |                |                  |
| Maintained by:       | Contact Phone: | Staff Signature: |

Fill in this warranty card in time after purchasing this printer.  
Please keep the warranty card properly, and it is not required to send it  
back to the seller. Carry the warranty card and the original invoice for  
maintenance.

Zhuhai Bentsai Electronics Co.,Ltd.